






PROTECTION FLEECE

for membranless presses

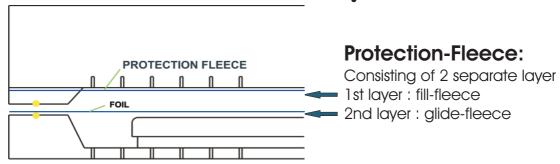

Application:

The combination of this two fleece-cloths will be stretched-in under the heating plate with it to take care of the sensitive foils at pre-heating. Also a damage of the foils will be avoided.

Advantages: The foil will be pre-heated constantly without direct contact to the heating-plate. Air-enclosing at pre-heating between the heating-plate and foil will be eliminated nearly.

Possibility of delivery:
Sample on inquiry
Sample on inquiry
Sample on inquiry
www.rapha-systems.at
www.rapha-sys

Fill-fleece (1st layer)

Standard width: 1600mm Length: pieces cut according to the details of measure - or roles (10 or 25 metres)

Glide-fleece (2nd layer)

Standard width: 1580mm Length: Pieces cut according to the details of measure - or roles (10 or 25 metres)

Glide-Fleece (2nd layer) with an around-running special fastener

manufacturing according to the exactly details of measure

